

MICROPROCESS RPM & LINE-SPEED METER (DISPLAY 0.8")

**MODEL
MMX-L**



FEATURES

- Accuracy 0.01% F.S.
- Measuring Pulse(TTL,CMOS), Magnetic pick-up
- Accepts input rates up to 1KHz
- Display type of RPM or line-speed can be modified
- Display unit M/min, Y/min,ft/min can be modified
- Input pulse of revolution (1~999) can be modified (1-99999)
- Decimal point can be modified
- One alarm function (optional)
- Dimension small and High stability


1.MODEL:MMX-L

| | | | | | |
|----|------------------------------|----|------------------------------|--------------------------------------|--------------|
| NO | Input Type | NO | Input Type | NO | Alarm output |
| A | Pulse (TTL) (5V) | E | Magnetic pick-up (500mV-15V) | 0 | None |
| B | Pulse (NPN) (12V) | F | AC2-60V | 1 | One |
| C | Pulse (PNP) (12V) | O | SPECIFIED | Relay contact (AC250V-10A,DC30V-10A) | |
| D | Magnetic pick-up (50mV-1.5V) | | | | |

2.SPECIFICATION

- Aux.power supper : AC110/220V ± 20%(50/60Hz)
- Measuring accuracy : 0.01% F.S. (23 ± 5)
- Count input type : Jump-pin selectable current sourcing(NPN) or current sinking (PNP)
- Count input trigger levels : Hi bias (CMOS) (V_{IH}=7.5V, V_{IL}=5.5V)
Lo bias (TTL) (V_{IH}=3.7V, V_{IL}=2.0V)
- Max.count rates : 50KHz (50% duty cycle)
- Sampling time : 10 cycles/sec. (>10Hz)
f cycles/sec. (<10Hz)
- Over input indication : " doFL "
- Readout range : 0-99999 digit adjustable
- Diameter setting : 0-9.9999M (Touch switches setting)
- Alarm action : HI or Lo adjustable
- Relay contact output : AC 250V-10A, DC 30V-10A
- Parameter setting : Touch switches
- Display : Red high efficiency LEDs high 20.32mm (0.8")
- Sensor power supply : 12VDC ± 3%(<60mA)
- Memory mode : Non-volatile E² PROM memory
- Dielectric strength : 2KVac/1 min. (input/power/display)
- Operating condition : 0-50 (20 to 90% RH non-condensed)
- Storage condition : 0-70 (20 to 90% RH non-condensed)
- CE EMC Certification : EN 55022:1998/A1:2000 Class A
EN 61000-3-2:2000
EN 61000-3-3:1995/A1:2001
EN 55024:1998/A1:2001

3.OUTSIDE DIMENSION AND CONNECTION DIAGRAM

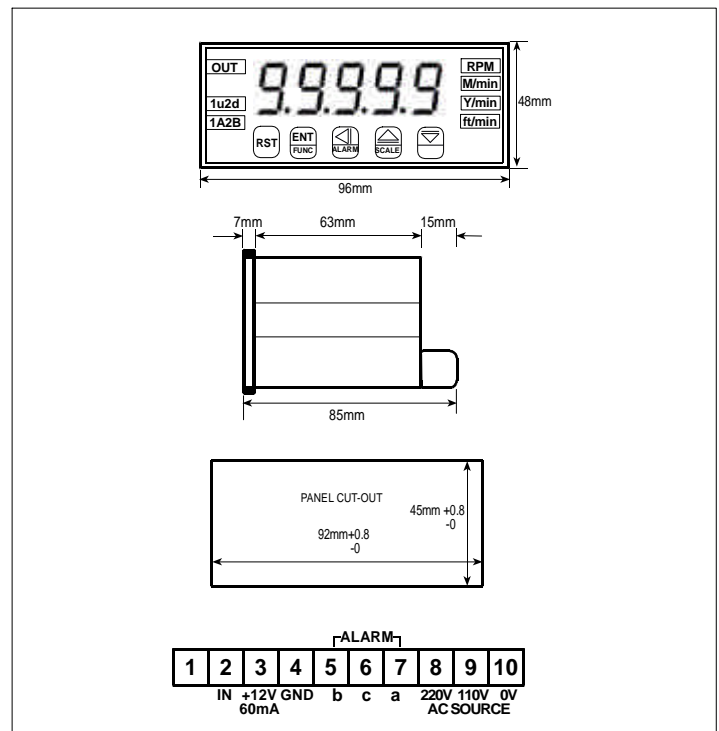

4.Ordering information

MODEL:MMX-LB1

- Input Type : Pulse (NPN) (12V)
- Display unit : RPM
- Alarm output : None